

KVASER LEAF LIGHT HS V2 CB

編碼：73-30130-00733-8

The Leaf Light v2 CB is Kvaser's popular Leaf Light v2 interface's bare PCB version. It is a single-channel, high-speed, USB-to-CAN current loop interface. As the main force in the USB-to-CAN interface field, Kvaser's Leaf Light product series provides PC with reliable and low-cost connections.

KVASER LEAF LIGHT HS V2 CB

編碼：73-30130-00733-8

主要性能

- Kvaser Leaf Light HS V2 CB是一款高速USB 介面，用於CAN 匯流排，可提供在CAN匯流排上無損傳輸和接收標準和擴展的CAN 消息。
- USB和CAN都使用6引腳連接器連接，並與Molex 51021 PicoBlade™(例如，外殼51021-0600和端子50079-8000) 相匹配。
- 每秒8000條消息，每條消息時間戳精度為100 微秒。
- 支持11-bit 位 (CAN 2.0A) 和29位 (CAN 2.0B active) 識別字。
- 高速CAN連接 (符合ISO 11898-2) ，最高達Mbit/s。
- 電氣隔離，增強對電源浪湧或電擊的保護。
- 本地緩衝和預處理實現了高性能，並減少了PC上的時間關鍵任務。

技術規格

比特率	40-1000 kbps
溫度範圍	-20至75 °C
時間戳	100
每秒接收資訊量	8000 mps
每秒發送資訊量	8000 mps
重量	100 g
長度	100 mm
高度	5 mm
通道數	1
認證	CE, RoHS
介面	USB
類型	PC介面, 介面
操作系統	Windows 10, 8, 7, XP, Vista和Linux
連接器	MOLEX 6引腳連接器
緩衝	板載緩衝區
電隔離	有
錯誤幀生成	無
錯誤幀監測	無
靜音模式	否
材料	PA66
聲音提示	無
電流消耗	典型值, 90毫安

保修：
2 年保修。

支持：
通過聯繫sales@hongtronics.com 可獲取所有產品的免費技術支持。

軟體：
文檔、軟體和驅動程式可免費下載。
www.kvaser.com/downloads


Kvaser CANlib SDK是一個免費資源，包括您開發Kvaser CAN介面軟體所需的一切。包括完整的文檔和許多程式樣本，使用C, C++, C#, Delphi, Java, Python和Visual Basic編寫。

所有Kvaser CAN介面板共用一個通用的軟體API。為一個介面類型編寫的程式將在其他介面類型上運行，無需修改！

可用J2534應用程式編程介面。

可用RP1210A應用程式編程介面。

Windows HTML-Help和Adobe Acrobat 格式的線上文檔。

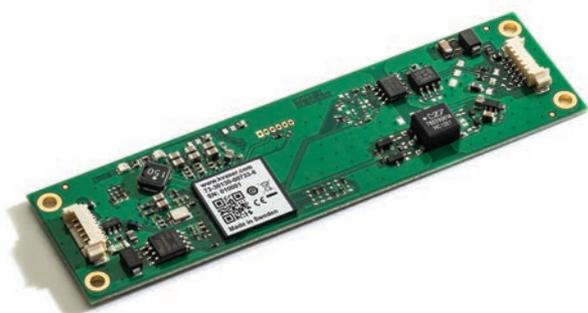

宏虹電子科技有限公司

104 台北市中山敬業一路99號3樓(大灣科技中心大樓)

聯絡電話：02-85015332 / 0901353661



宏虹官方網站



聯絡我們



了解更多

